

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 6 TOWNSHIP 15 RANGE 3

DATE: 3-21-02 10-02-07

PARTY CHIEF: -Kiste Wilcoxon

CREW: _____

TYPE OF MARKER: Harrison


METHOD OF ESTABLISHMENT: County: 9-4-97

IN. S.P.C. E ZONE NAD '83

NAME: 15030604

N: 502422.9271(m)

E: 49984.2036(m)

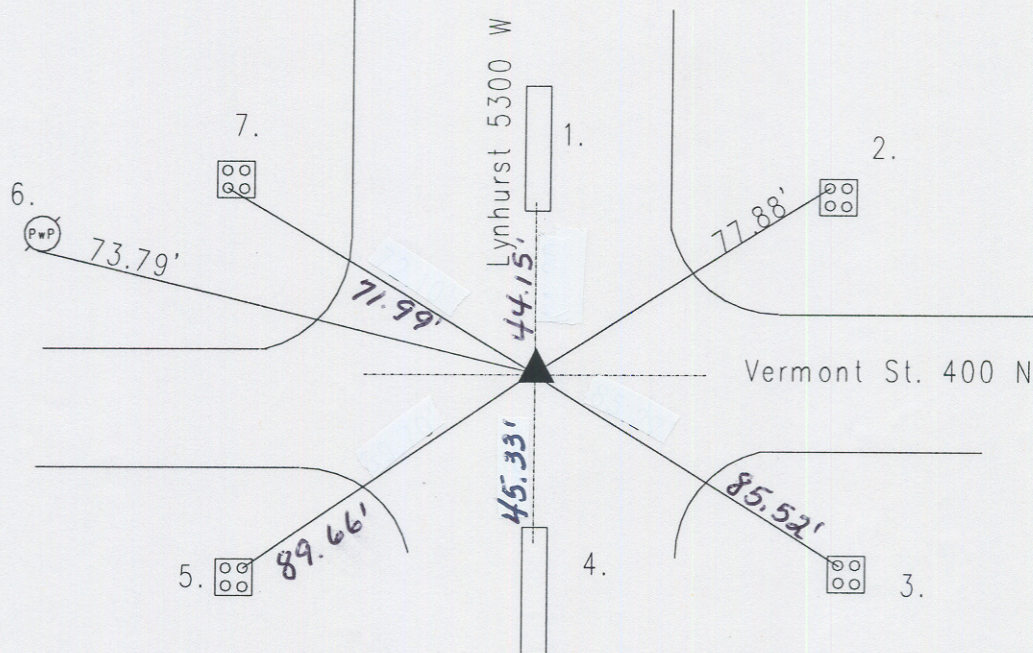

Original post set 1820 by Laughlin with witnesses: 10" sugar S 24 W 43 links;
4" dogwood N 69 E 21 links per Marion County Atlas pg. 2. Hosbrook 3-26-1855
called rock set with witness: 18" beech S 38 W 22 links , 18" beech S 82 1/2
E 46 links per Wayne Township Legal Survey Book pg. 21. 6-27-40 called stone.
12-4-46 called stone. Unversaw 7-25-55 called copper plug. Monroe 8-29-57 called
same. Hylden 11-27-74 called brass plug. Wilcoxon 9-11-84 called same.
Excavated 4-22-91 by Wilcoxon and set Harrison per Lynhurst Street Project.
Re-tied 9-4-97 by Kiste. Re-tied 3-21-02 by Kiste.
15030604

REF.	DISTANCE	DESCRIPTION
1.	44.15'	Due N to center of S-end of concrete median
2.	77.88'	Cut 'x' NW-bolt of signal pole base
3.	85.52'	Cut 'x' NW-bolt of signal pole base
4.	45.33'	Due S to N-end of concrete median
5.	89.66'	Cut 'x' NE-bolt of signal pole base
6.	73.79'	PK nail SW PwP#15-495 B 4"up
7.	71.99'	Cut 'x' SW-bolt of signal pole base